


# NAIL BASE

## BUTYL DECK SYSTEM | INSTALLATION DETAILS

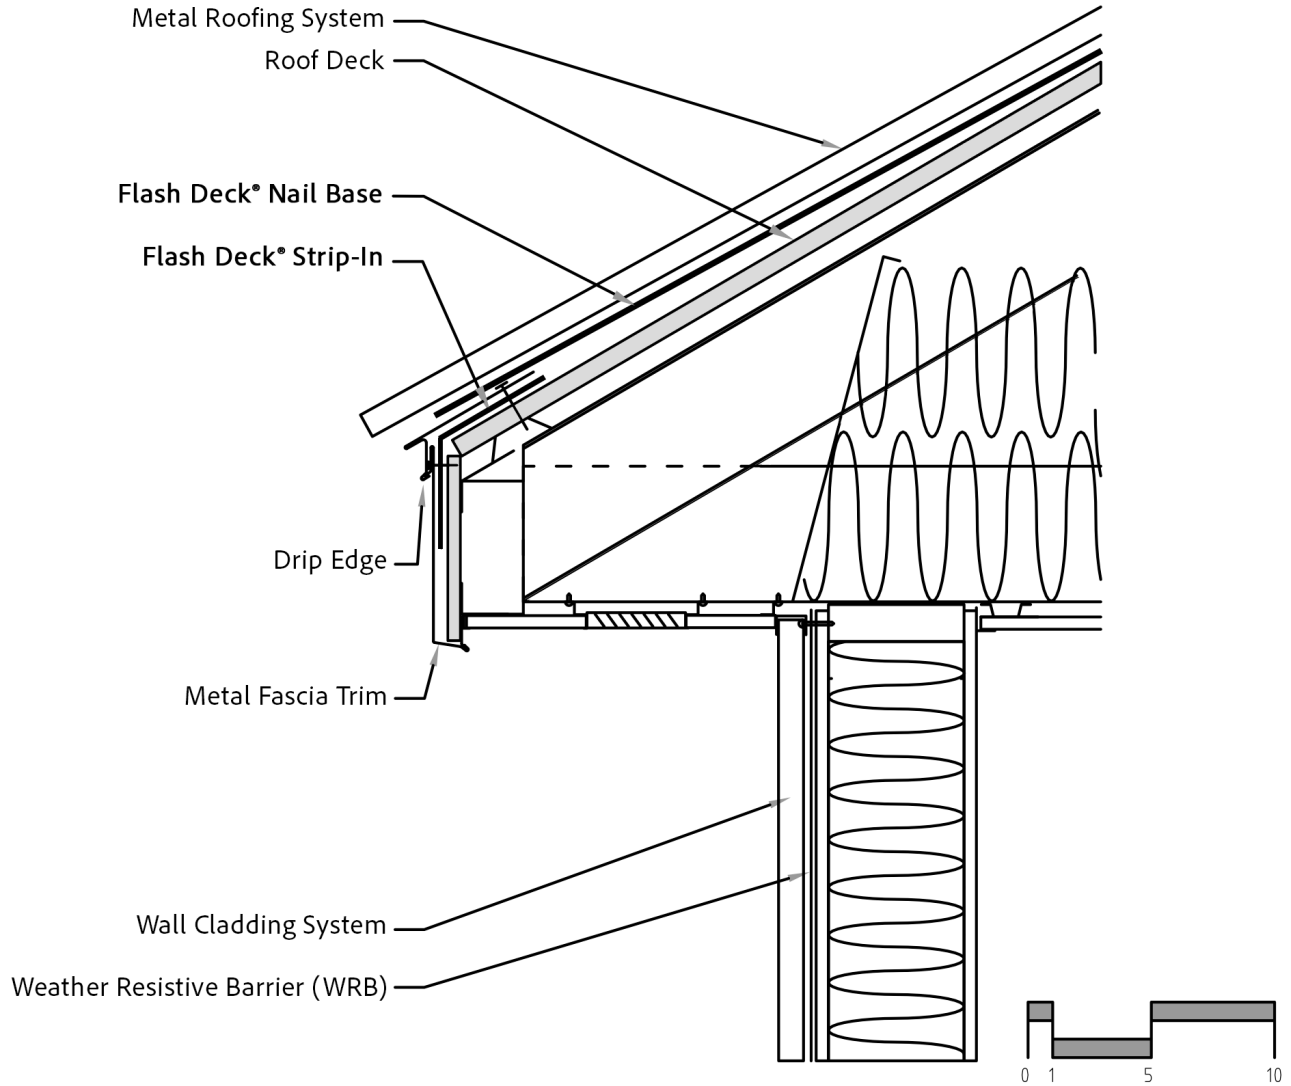

### NOTES:

- A. PREPARATION:** ENSURE THE SUBSTRATE IS CLEAN, DRY, AND FREE OF DEBRIS.
- B. STRIP-IN:** INSTALL FLASH DECK® STRIP-IN DIRECTLY ONTO THE ROOF DECK, WRAPPING IT OVER THE EDGE AND ONTO THE FASCIA. ENSURE STRIP-IN REMAINS CONCEALED BEHIND THE DRIP EDGE FACE ONCE INSTALLED.
- C. BONDING:** APPLY FIRM PRESSURE USING A HAND ROLLER TO ACTIVATE THE ADHESIVE BOND.
- D. DRIP EDGE:** INSTALL THE DRIP EDGE ONTO THE INSTALLED STRIP-IN.
- E. NAIL BASE:** APPLY FLASH DECK® NAIL BASE TO THE NOSE OF THE DRIP EDGE, ENSURING IT FULLY COVERS ALL FASTENERS

**NOTICE:** IN CERTAIN REGIONS, MECHANICALLY FASTENED UNDERLAYMENTS ARE INSTALLED TO THE EAVE. THIS INSTALLATION METHOD IS NOT AN ICE DAM PREVENTATIVE MEASURE, CONSULT LOCAL BUILDING CODES.

**PROFESSIONAL SUPPORT:** FOR COMPREHENSIVE TECHNICAL SPECIFICATIONS AND TO ACCESS OUR SPECIFIC INSTALLATION PROTOCOLS, PLEASE VISIT [ROOFERSADVANTAGE.COM](https://www.roofersadvantage.com) TO "GET CERTIFIED" OR CONTACT OUR TEAM DIRECTLY FOR PROFESSIONAL TECHNICAL SUPPORT.

**GENERAL NOTE:** INSTALL ROOFING AND FLASHING DETAILS IN STRICT COMPLIANCE WITH THE PRIMARY ROOFING MANUFACTURER'S PRINTED APPLICATION INSTRUCTIONS, WHILE MAINTAINING THE CONTINUOUS WATER-SHEDDING FUNCTIONALITY OF THE FLASH DECK® UNDERLAYMENT SYSTEM.

Roofers' Advantage® Products, Inc.

4 Valhalla Way, Wakefield, NH 03872  
+1(888)-YELO-NOW (935-6669)  
[tech@roofersadvantage.com](mailto:tech@roofersadvantage.com)

[www.roofersadvantage.com](https://www.roofersadvantage.com)

### NAIL BASE EAVE DETAIL METAL APPLICATION FLASH DECK® NAIL BASE SYSTEM

Drawing: NBM – 01


Scale: NOT TO SCALE

Created: 08/01/2026

Supersedes: N/A



Get Butyl Deck Certified:





# NAIL BASE

## BUTYL DECK SYSTEM | INSTALLATION DETAILS

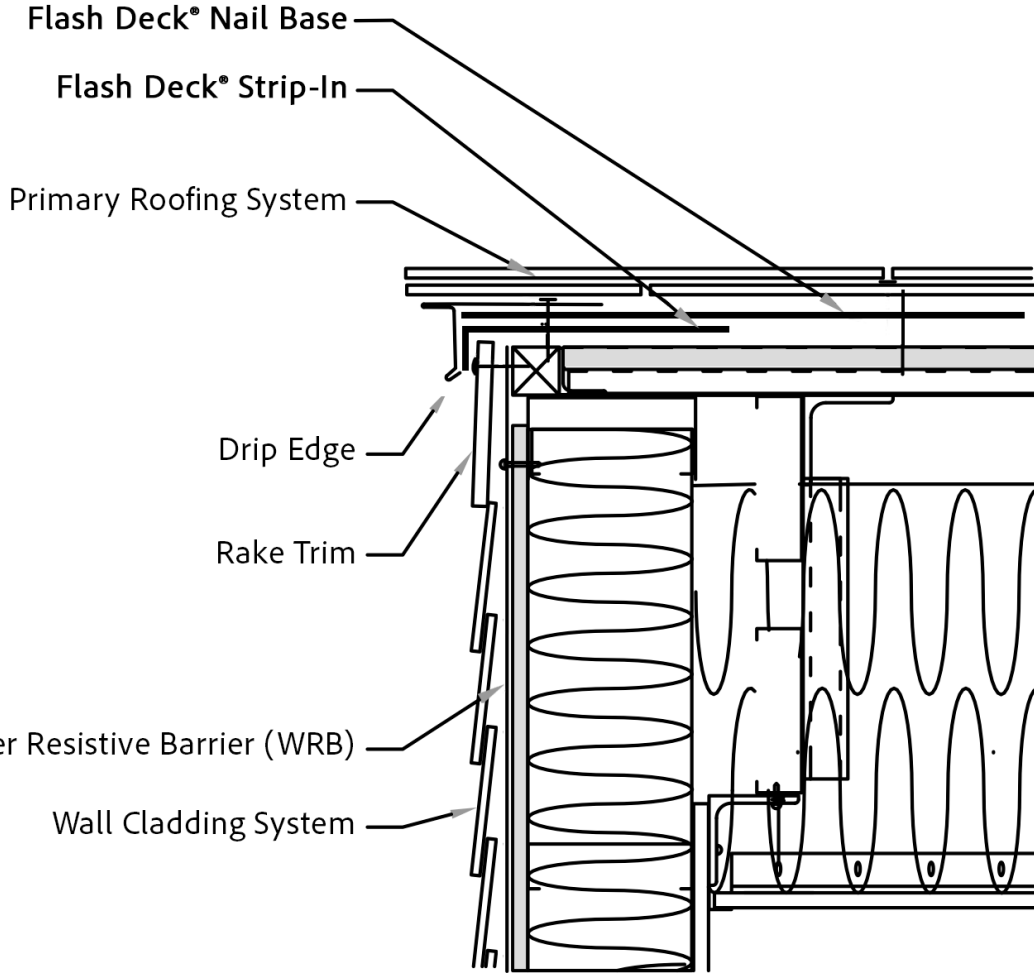

### NOTES:

- A. PREPARATION:** ENSURE THE SUBSTRATE IS CLEAN, DRY, AND FREE OF DEBRIS.
- B. STRIP-IN:** INSTALL FLASH DECK® STRIP-IN DIRECTLY ONTO THE ROOF DECK, WRAPPING IT OVER THE EDGE AND ONTO THE RAKE. ENSURE STRIP-IN REMAINS CONCEALED BEHIND THE DRIP EDGE FACE ONCE INSTALLED.
- C. BONDING:** APPLY FIRM PRESSURE USING A HAND ROLLER TO ACTIVATE THE ADHESIVE BOND.
- D. NAIL BASE:** INSTALL HORIZONTALLY TO THE RAKE EDGE COVERING STRIP-IN TO THE RAKE EDGE.
- E. DRIP EDGE:** INSTALL THE DRIP EDGE DIRECTLY ON TOP OF FLASH DECK® NAIL BASE.
- F. OPTIONAL ENHANCEMENT:** APPLY STRIP-IN ONTO THE DRIP EDGE NAIL FLANGE ENCAPSULATING ALL FASTNERS.

**PROFESSIONAL SUPPORT:** FOR COMPREHENSIVE TECHNICAL SPECIFICATIONS AND TO ACCESS OUR SPECIFIC INSTALLATION PROTOCOLS, PLEASE VISIT [ROOFERSADVANTAGE.COM](https://roofersadvantage.com) TO "GET CERTIFIED" OR CONTACT OUR TEAM DIRECTLY FOR PROFESSIONAL TECHNICAL SUPPORT.

**GENERAL NOTE:** INSTALL ROOFING AND FLASHING DETAILS IN STRICT COMPLIANCE WITH THE PRIMARY ROOFING MANUFACTURER'S PRINTED APPLICATION INSTRUCTIONS, WHILE MAINTAINING THE CONTINUOUS WATER-SHEDDING FUNCTIONALITY OF THE FLASH DECK® UNDERLAYMENT SYSTEM.

Roofers' Advantage® Products, Inc.

4 Valhalla Way, Wakefield, NH 03872  
+1(888)-YELO-NOW (935-6669)  
[tech@roofersadvantage.com](mailto:tech@roofersadvantage.com)

[www.roofersadvantage.com](https://www.roofersadvantage.com)

## NAIL BASE RAKE EDGE DETAIL METAL APPLICATION FLASH DECK® NAIL BASE SYSTEM

Drawing: NBM – 02


Scale: NOT TO SCALE

Created: 08/01/2026

Supersedes: N/A


Get Butyl Deck Certified:





# NAIL BASE

## BUTYL DECK SYSTEM | INSTALLATION DETAILS

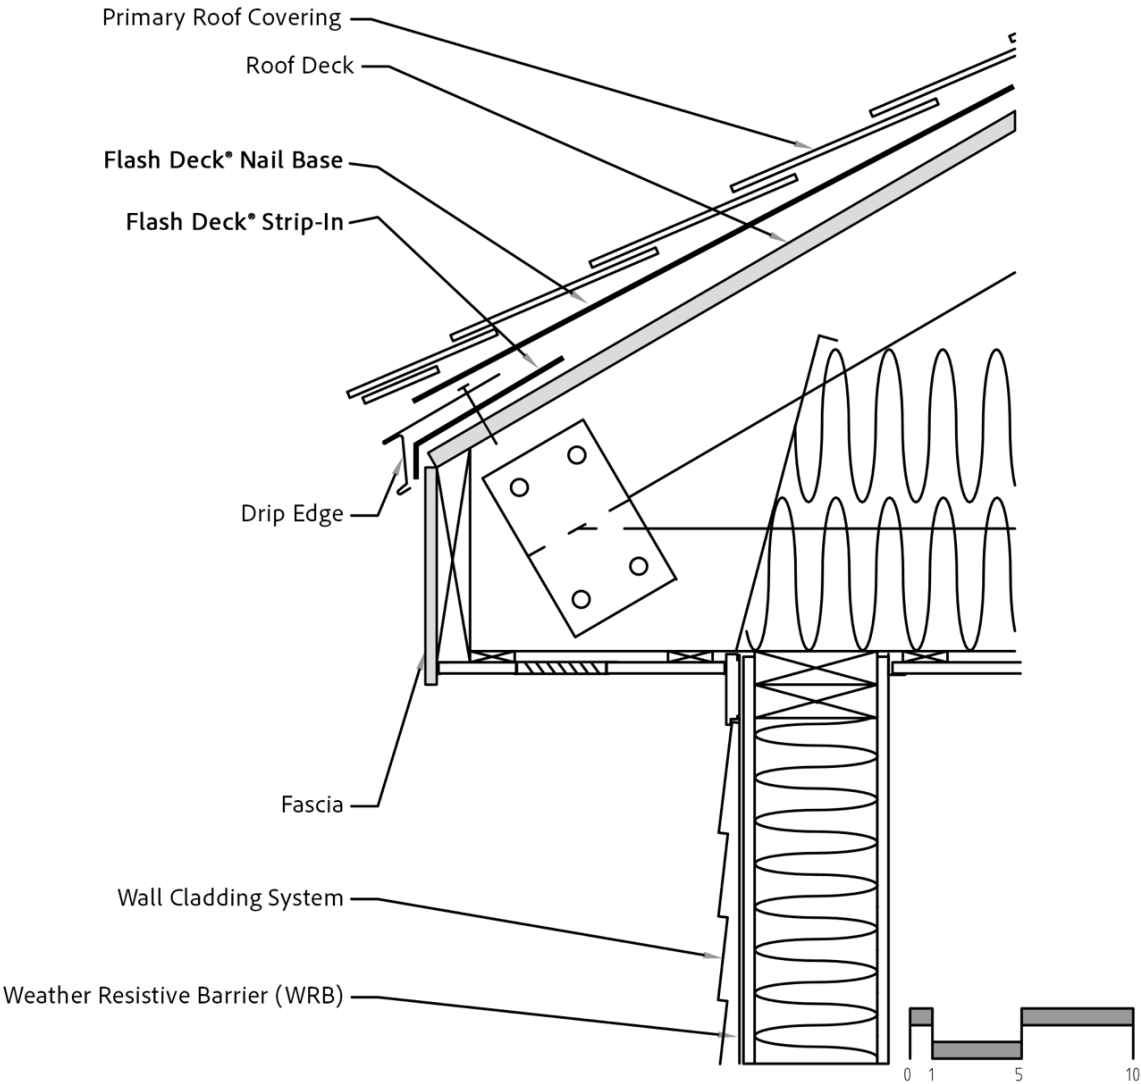

NOTES:


- A. **PREPARATION:** ENSURE THE SUBSTRATE IS CLEAN, DRY, AND FREE OF DEBRIS.
- B. **STRIP-IN:** INSTALL FLASH DECK® STRIP-IN DIRECTLY ONTO THE ROOF DECK, WRAPPING IT OVER THE EDGE AND ONTO THE FASCIA. ENSURE STRIP-IN REMAINS CONCEALED BEHIND THE DRIP EDGE FACE ONCE INSTALLED.
- C. **BONDING:** APPLY FIRM PRESSURE USING A HAND ROLLER TO ACTIVATE THE ADHESIVE BOND.
- D. **DRIP EDGE:** INSTALL THE DRIP EDGE ONTO THE INSTALLED STRIP-IN.
- E. **NAIL BASE:** APPLY FLASH DECK® NAIL BASE TO THE NOSE OF THE DRIP EDGE, ENSURING IT FULLY COVERS ALL FASTENERS

**NOTICE:** IN CERTAIN REGIONS, MECHANICALLY FASTENED UNDERLAYMENTS ARE INSTALLED TO THE EAVE. THIS INSTALLATION METHOD IS NOT AN ICE DAM PREVENTATIVE MEASURE, CONSULT LOCAL BUILDING CODES.

**PROFESSIONAL SUPPORT:** FOR COMPREHENSIVE TECHNICAL SPECIFICATIONS AND TO ACCESS OUR SPECIFIC INSTALLATION PROTOCOLS, PLEASE VISIT [ROOFERSADVANTAGE.COM](https://www.roofersadvantage.com) TO "GET CERTIFIED" OR CONTACT OUR TEAM DIRECTLY FOR PROFESSIONAL TECHNICAL SUPPORT.



**GENERAL NOTE:** INSTALL ROOFING AND FLASHING DETAILS IN STRICT COMPLIANCE WITH THE PRIMARY ROOFING MANUFACTURER'S PRINTED APPLICATION INSTRUCTIONS, WHILE MAINTAINING THE CONTINUOUS WATER-SHEDDING FUNCTIONALITY OF THE FLASH DECK® UNDERLAYMENT SYSTEM.

|                                                                                                                                                                                                                         |                                                                                                   |                     |                                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>Roofers' Advantage® Products, Inc.</b><br>4 Valhalla Way, Wakefield, NH 03872<br>+1(888)-YELO-NOW (935-6669)<br>tech@roofersadvantage.com<br><a href="https://www.roofersadvantage.com">www.roofersadvantage.com</a> | <b>NAIL BASE EAVE DETAIL</b><br><b>SHINGLE APPLICATION</b><br><b>FLASH DECK® NAIL BASE SYSTEM</b> | Drawing: NBS – 01   | <b>Get Butyl Deck Certified:</b><br> |
|                                                                                                                                                                                                                         |                                                                                                   | Scale: NOT TO SCALE |                                                                                                                           |
|                                                                                                                                                                                                                         |                                                                                                   | Created: 08/01/2026 |                                                                                                                           |
|                                                                                                                                                                                                                         |                                                                                                   | Supersedes: N/A     |                                                                                                                           |



# NAIL BASE

## BUTYL DECK SYSTEM | INSTALLATION DETAILS

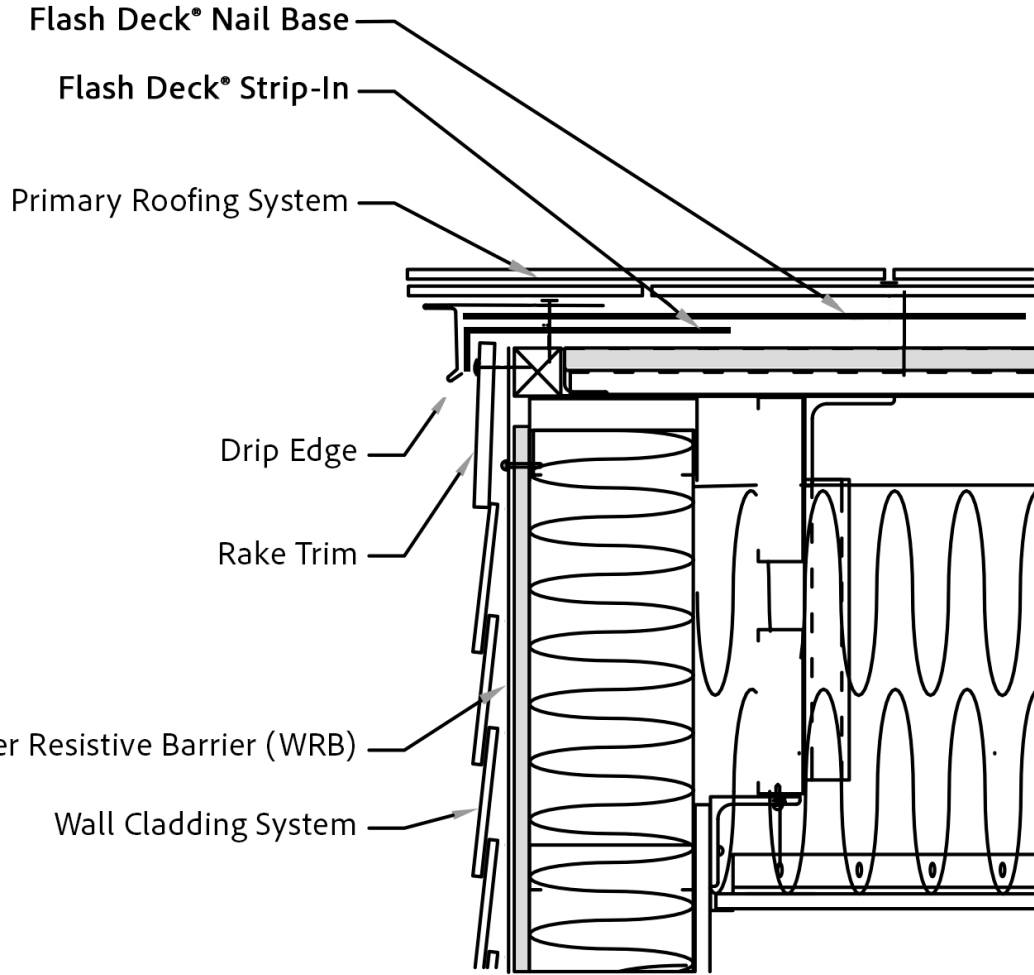

### NOTES:

- A. PREPARATION:** ENSURE THE SUBSTRATE IS CLEAN, DRY, AND FREE OF DEBRIS.
- B. STRIP-IN:** INSTALL FLASH DECK® STRIP-IN DIRECTLY ONTO THE ROOF DECK, WRAPPING IT OVER THE EDGE AND ONTO THE RAKE. ENSURE STRIP-IN REMAINS CONCEALED BEHIND THE DRIP EDGE FACE ONCE INSTALLED.
- C. BONDING:** APPLY FIRM PRESSURE USING A HAND ROLLER TO ACTIVATE THE ADHESIVE BOND.
- D. NAIL BASE:** INSTALL HORIZONTALLY TO THE RAKE EDGE COVERING STRIP-IN TO THE RAKE EDGE.
- E. DRIP EDGE:** INSTALL THE DRIP EDGE DIRECTLY ON TOP OF FLASH DECK® NAIL BASE.
- F. OPTIONAL ENHANCEMENT:** APPLY STRIP-IN ONTO THE DRIP EDGE NAIL FLANGE ENCAPSULATING ALL FASTNERS.

**PROFESSIONAL SUPPORT:** FOR COMPREHENSIVE TECHNICAL SPECIFICATIONS AND TO ACCESS OUR SPECIFIC INSTALLATION PROTOCOLS, PLEASE VISIT [ROOFERSADVANTAGE.COM](https://www.roofersadvantage.com) TO "GET CERTIFIED" OR CONTACT OUR TEAM DIRECTLY FOR PROFESSIONAL TECHNICAL SUPPORT.

**GENERAL NOTE:** INSTALL ROOFING AND FLASHING DETAILS IN STRICT COMPLIANCE WITH THE PRIMARY ROOFING MANUFACTURER'S PRINTED APPLICATION INSTRUCTIONS, WHILE MAINTAINING THE CONTINUOUS WATER-SHEDDING FUNCTIONALITY OF THE FLASH DECK® UNDERLAYMENT SYSTEM.

Roofers' Advantage® Products, Inc.

4 Valhalla Way, Wakefield, NH 03872  
+1(888)-YELO-NOW (935-6669)

[tech@roofersadvantage.com](mailto:tech@roofersadvantage.com)

[www.roofersadvantage.com](https://www.roofersadvantage.com)

## NAIL BASE RAKE EDGE DETAIL SHINGLE APPLICATION FLASH DECK® NAIL BASE SYSTEM

Drawing: NBS – 02

Scale: NOT TO SCALE

Created: 08/01/2026

Supersedes: N/A

Get Butyl Deck Certified:

