


SHINGLE BASE

BUTYL DECK SYSTEM | INSTALLATION DETAILS

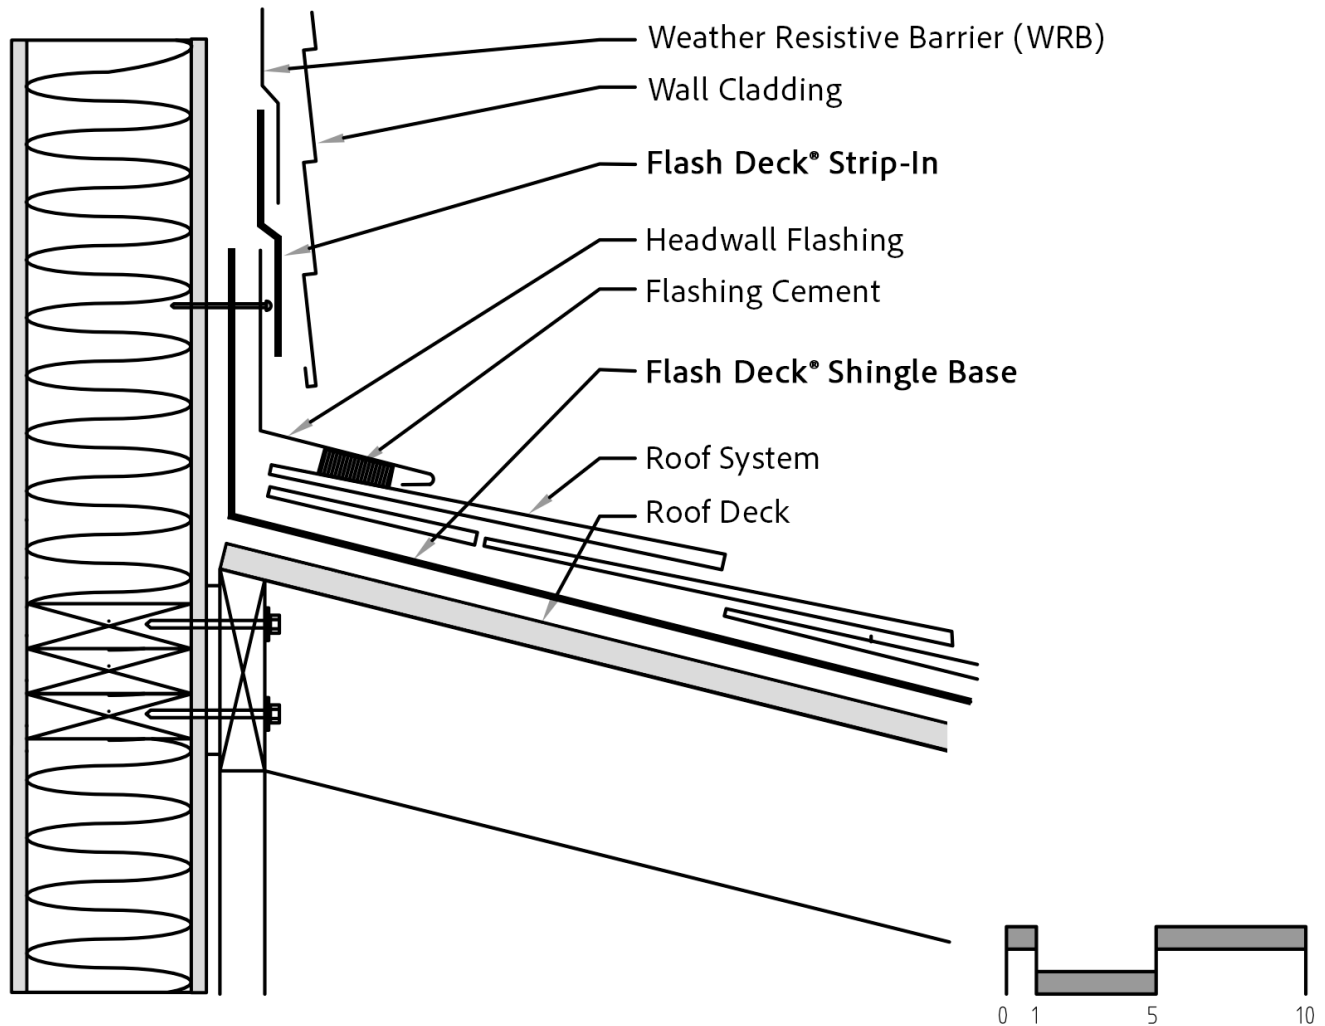

NOTES:

- A. PREPARATION:** ENSURE THE ROOF DECK AND WALL SHEATHING IS CLEAN, DRY, AND FREE OF DEBRIS.
- B. TRANSITION:** INSTALL FLASH DECK® SHINGLE BASE UP THE VERTICAL WALL AS REQUIRED BY CODE, ENSURING A SMOOTH TRANSITION FROM ROOF DECK TO WALL SUBSTRATE.
- C. INSTALL FLASHINGS:** COMPLETE THE ROOFING SYSTEM, INCLUDING HEADWALL FLASHING.
- D. ALIGNMENT:** SNAP CHALK LINE ONTO HEADWALL FLASHING ABOVE ANY VISIBLE SIDING COMPONENTS.
- E. STRIP-IN:** WITH PARTNER, INSTALL FLASH DECK® STRIP-IN ONTO VERTICAL LEG ALONG CHALK LINE AND UP WALL.
- F. BONDING:** APPLY FIRM PRESSURE USING A HAND ROLLER ACROSS THE ENTIRE AREA TO ACTIVATE THE ADHESIVE BOND.

PROFESSIONAL SUPPORT: FOR COMPREHENSIVE TECHNICAL SPECIFICATIONS AND TO ACCESS OUR SPECIFIC INSTALLATION PROTOCOLS, PLEASE VISIT [ROOFERSADVANTAGE.COM](https://www.roofersadvantage.com) TO "GET CERTIFIED" OR CONTACT OUR TEAM DIRECTLY FOR PROFESSIONAL TECHNICAL SUPPORT.

GENERAL NOTE: INSTALL ROOFING AND FLASHING DETAILS IN STRICT COMPLIANCE WITH THE PRIMARY ROOFING MANUFACTURER'S PRINTED APPLICATION INSTRUCTIONS, WHILE MAINTAINING THE CONTINUOUS WATER-SHEDDING FUNCTIONALITY OF THE FLASH DECK® UNDERLAYMENT SYSTEM.

Roofers' Advantage® Products, Inc.

4 Valhalla Way, Wakefield, NH 03872
+1(888)-YELO-NOW (935-6669)

tech@roofersadvantage.com

www.roofersadvantage.com

HEADWALL DETAIL

FLASH DECK® SHINGLE BASE

Drawing: SHG – 08

Scale: NOT TO SCALE

Created: 08/01/2026

Supersedes: N/A

Get Butyl Deck Certified:

